

DESTROYIT® 2604

Powerful shredder with ECC (Electronic Capacity Control) indicator and an automatic oiler on cross-cut, micro-cut and super micro-cut models.

Security level P-2	4 mm strip-cut (3/16 inch)
Sheet capacity:	27-30*
Security level P-4	4 x 40 mm cross-cut (3/16 x 1 1/2 inches)
Sheet capacity:	23-25*
Security level P-5	2 x 15 mm cross-cut (3/32 x 5/8 inches)
Sheet capacity:	14-16*
Security level P-6	.8 x 12 mm micro-cut (1/32 x 15/32 inches)
Sheet capacity:	9-11*
Security level P-7	.8 x 5 mm super micro-cut (1/32 x 3/16 inches)
Sheet capacity:	6-8*

*Certified using 8 1/2" x 11" 20 lb. bond and recommended power supply.



Comprehensive SPS safety package: Easy Switch control element uses illuminated color codes and symbols to indicate operational status and functions as an emergency stop switch; patented, electronically controlled, transparent safety shield in the feed opening; automatic power cut-off when cabinet is opened or shred bin is full; automatic reverse and power cut-off when overfed; double protection against overheating; Zero Energy Consumption sleep mode cuts off power supply after 30 minutes of inactivity.

Automatic start and stop controlled by photo cell. Patented Electronic Capacity Control (ECC) indicator prevents jams by monitoring sheet capacity levels during operation. Automatic oil injection ensures optimal performance at all times (cross-cut, micro-cut, and super micro-cut models). High quality, hardened steel cutting shafts take staples, paper clips, credit cards, and CDs / DVDs (strip- and cross-cut models). Micro- and super micro-cut models meet all NSA/CSS specifications and are DOD approved. Lifetime warranty on the cutting shafts (strip- and cross-cut models). 1 year warranty on micro- and super micro-cut cutting shafts. Quiet and powerful single phase motor rated for continuous operation. Sturdy Twin Drive System with fully enclosed gear box housing. High quality wooden cabinet mounted on casters. Convenient, environmentally friendly shred bin does not require disposable shred bags.

Specifications

Shred volume, gallons	26
Feed opening, inches	10 1/4
Electrical requirements, volts	115
Maximum horsepower	1
Dimensions (D x W x H), inches	18 1/2 x 19 1/2 x 36 1/2
Shipping weight, pounds	123

ProSource Packaging, Inc.
14911 Stuebner Airline Road Suite A
Houston, TX 77069
www.Machine-Solution.com

Toll-Free (800) 203-0233
Office: (281) 453-8801
Fax: (281-453) 8806

DESTROYIT® 2604

Features




SOLID STEEL CUTTING SHAFTS

High grade, hardened steel cutting shafts are milled in our Balingen factory and warranted for life.¹



EASY SWITCH

Multifunction control element uses optical signals to indicate operational status and functions as an emergency stop switch.

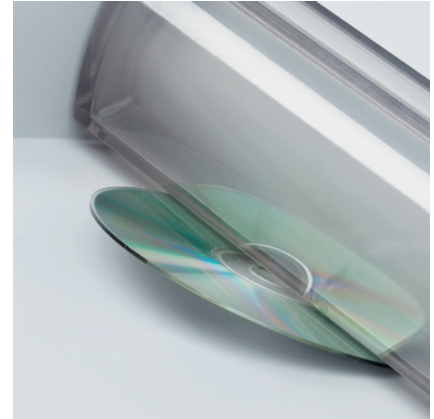

SAFE SHREDDING OF CDs / DVDs

On CD capable models, the electronically controlled shield protects the operator from stray splinters of plastic.



ENVIRONMENTALLY FRIENDLY BIN

Durable, lightweight shred bins can be used with or without disposable bags.



CAPACITY INDICATOR

Patented Electronic Capacity Control (ECC) indicator monitors sheet capacity levels during operation to prevent jams.



AUTOMATIC OIL INJECTION

The cutting shafts are automatically lubricated while shredding, ensuring optimal performance (cross-cut, micro-cut, and super micro-cut models).



1) Micro- and super micro-cut shafts are covered by a 1 year warranty.

